

AD-A066 274

FOREIGN TECHNOLOGY DIV WRIGHT-PATTERSON AFB OHIO
METHOD OF PLASTIC DEFORMATION OF METALS AND ALLOYS, (U)
NOV 77 S Z FIGLIN, A B GERCHIKOV, Y G KAPLIN
FTD-ID(RS)T-1954-77

F/G 13/8

UNCLASSIFIED

NL

1 OF 1
ADA
066274



END
DATE
FILMED

5-79
DDC


FOREIGN TECHNOLOGY DIVISION



METHOD OF PLASTIC DEFORMATION OF METALS AND ALLOYS

by

S. Z. Figlin, A. B. Gerchikov,
Yu. G. Kaplin

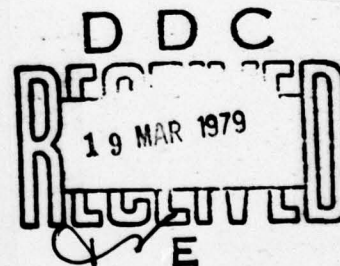

Approved for public release;
distribution unlimited.

AD-A066274

EDITED TRANSLATION

FTD-ID(RS)T-1954-77

23 November 1977

MICROFICHE NR: *FTD-77-C-001455*

METHOD OF PLASTIC DEFORMATION OF METALS AND ALLOYS

By: S. Z. Figlin, A. B. Gerchikov, Yu. G. Kaplin

English pages: 4

Source: USSR Patent No. 159382, 7 Dec 1963,
pp 1-2

Country of origin: USSR

Translated by: Robert A. Potts

Requester: AFML/LLS

Approved for public release; distribution unlimited.

MTIS	Write Section <input checked="" type="checkbox"/>
DDC	B.1f Section <input type="checkbox"/>
ANALYSIS	<input type="checkbox"/>
RUS 1	
DISTRIBUTION/AVAILABILITY CODES	
SPECIAL	
<i>A</i>	

THIS TRANSLATION IS A RENDITION OF THE ORIGINAL FOREIGN TEXT WITHOUT ANY ANALYTICAL OR EDITORIAL COMMENT. STATEMENTS OR THEORIES ADVOCATED OR IMPLIED ARE THOSE OF THE SOURCE AND DO NOT NECESSARILY REFLECT THE POSITION OR OPINION OF THE FOREIGN TECHNOLOGY DIVISION.

PREPARED BY:

TRANSLATION DIVISION
FOREIGN TECHNOLOGY DIVISION
WP-AFB, OHIO.

FTD -ID(RS)T-1954-77

Date 23 Nov 1977

U. S. BOARD ON GEOGRAPHIC NAMES transliteration SYSTEM

Block	Italic	Transliteration	Block	Italic	Transliteration
А а	<i>А а</i>	A, a	Р р	<i>Р р</i>	R, r
Б б	<i>Б б</i>	B, b	С с	<i>С с</i>	S, s
В в	<i>В в</i>	V, v	Т т	<i>Т т</i>	T, t
Г г	<i>Г г</i>	G, g	У у	<i>У у</i>	U, u
Д д	<i>Д д</i>	D, d	Ф ф	<i>Ф ф</i>	F, f
Е е	<i>Е е</i>	Ye, ye; E, e*	Х х	<i>Х х</i>	Kh, kh
Ж ж	<i>Ж ж</i>	Zh, zh	Ц ц	<i>Ц ц</i>	Ts, ts
З з	<i>З з</i>	Z, z	Ч ч	<i>Ч ч</i>	Ch, ch
И и	<i>И и</i>	I, i	Ш ш	<i>Ш ш</i>	Sh, sh
Й й	<i>Й й</i>	Y, y	Щ щ	<i>Щ щ</i>	Shch, shch
К к	<i>К к</i>	K, k	Ъ ъ	<i>Ъ ъ</i>	"
Л л	<i>Л л</i>	L, l	Ы ы	<i>Ы ы</i>	Y, y
М м	<i>М м</i>	M, m	Ь ь	<i>Ь ь</i>	'
Н н	<i>Н н</i>	N, n	Э э	<i>Э э</i>	E, e
О о	<i>О о</i>	O, o	Ю ю	<i>Ю ю</i>	Yu, yu
П п	<i>П п</i>	P, p	Я я	<i>Я я</i>	Ya, ya

*ye initially, after vowels, and after Ъ, ь; e elsewhere.
When written as ë in Russian, transliterate as yë or ë.

RUSSIAN AND ENGLISH TRIGONOMETRIC FUNCTIONS

Russian	English	Russian	English	Russian	English
sin	sin	sh	sinh	arc sh	sinh ⁻¹
cos	cos	ch	cosh	arc ch	cosh ⁻¹
tg	tan	th	tanh	arc th	tanh ⁻¹
ctg	cot	cth	coth	arc cth	coth ⁻¹
sec	sec	sch	sech	arc sch	sech ⁻¹
cosec	csc	csch	csch	arc csch	csch ⁻¹

Russian	English
rot	curl
lg	log

1954

METHOD OF PLASTIC DEFORMATION OF METALS AND ALLOYS

Figlin S. Z., Gerchikov A. B., Kalpin Yu. G.

Methods of plastic deformation of metals and alloys with heating of billet in a molten medium, for example salts, are known.

By the described method for the deformation of highly alloyed low-plastic alloys, having narrow temperature range of working, the billet is deformed directly in the molten medium, surrounding it and the working tool.

The drawing shows the scheme of carrying out the described method.

Die 1 is installed in housing 2, filled with liquid heating

medium 3. The heating source is induction coil 4, winding of which is arranged around housing 2. The temperature of the heating medium is controlled by a thermoregulator (not shown on the drawing).

Movement of punch 5 can be continuous with a preset low speed or intermittent, when small deformation at ordinary speeds is alternated with standing for the passage of the process of softening.

Billet 6, undergoing deformation, is heated and deformed in one unit, in a melt of some substance (metal, salt, alkali, heat-resistant mineral oil etc.), heated to the necessary temperature. The melt provides high-speed heating of the billet and maintains the temperature in the preset and very narrow range in the process of shaping, which permits applying low speeds of deformation, while not worrying about cooling of the billet. Simultaneously the melt is a protective medium, protecting the surface of metal from oxidation, saturation by harmful elements etc.

In the described process is used the lubricating ability of the melt to produce parts with extruded elements of the type of high ribs, branches etc. with considerable reduction of the specific pressure due to decrease of friction.

During deformation with low speeds we obtain complete softening

of the material being deformed in the process of shaping, which raises its plasticity.

Subject of Invention

The method of plastic deformation of metals and alloys with heating of the billet in molten medium, for example salts, is distinguished by the fact that for the purpose of deformation of highly alloyed low-plastic alloys, having narrow temperature range of working, the billet is deformed directly in the molten medium, surrounding it and the working tool.

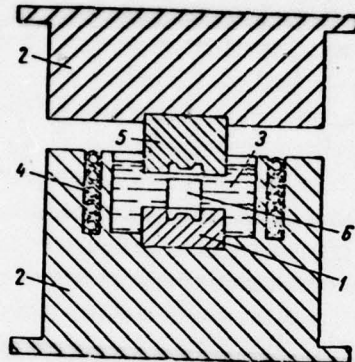


Figure 2

DISTRIBUTION LIST

DISTRIBUTION DIRECT TO RECIPIENT

ORGANIZATION	MICROFICHE	ORGANIZATION	MICROFICHE
A205 DMATC	1	E053 AF/INAKA	1
A210 DMAAC	2	E017 AF/ RDXTR-W	1
B344 DIA/RDS-3C	8	E404 AEDC	1
C043 USAMIIA	1	E408 APWL	1
C509 BALLISTIC RES LABS	1	E410 ADTC	1
C510 AIR MOBILITY R&D	1	E413 ESD	2
LAB/FIO		FTD	
C513 PICATINNY ARSENAL	1	CCN	1
C535 AVIATION SYS COMD	1	ETID	3
		NIA/PHS	1
		NICD	5
C591 FSTC	5		
C619 MIA REDSTONE	1		
D008 NISC	1		
H300 USAICE (USAREUR)	1		
P005 ERDA	1		
P055 CIA/CRS/ADD/SD	1		
NAVORDSTA (50L)	1		
NASA/KSI	1		
AFIT/LD	1		

FTD-ID(RS)T-1954-77